Tel: (818) 998-0223 Fax: (818) 998-6892 sales@AHSystems.com www.AHSystems.com

SAS-570 Double Ridge Guide Horn Antenna 170 MHz – 3 GHz

High gain, low VSWR, input handling capability up to 800 watts CW, and rugged design make this horn antenna excellent for both immunity and emissions testing.



Frequency Range: 170 MHz - 3 GHz

Antenna Factor (1 Meter) 11 to 33

Gain (dBi) 0 to 10.9

Maximum Continuous Power: 800 Watts

Impedance: 50 Ω

Max Radiated Field: 200 V/m


500 V/m (with Optional 7/16 DIN female connector)

Connector: N-Type, female

Mounting Base: ¼ - 20 Thread, female

Features

- Broad Frequency Range of 170 MHz to 3 GHz
- Linearly Polarized High Gain, Low VSWR
- Individually Calibrated (1, 3 & 10 Meter calibration included,
- horizontal polarization)
- Optional 7/16 Input connector available for increased power capability
- Three year Warranty



Recommended Accessories

- ATU-510 (Antenna Tripod)
- AEH-511 (Azimuth and Elevation Head)



Tel: (818) 998-0223 Fax: (818) 998-6892 sales@AHSystems.com www.AHSystems.com


A.H. Systems Inc.

9710 Cozycroft Ave. Chatsworth, CA 91311

Phone (818) 998-0223 Fax (818) 998-6892 E-mail: sales@A.H.Systems.com Web site: http://www.AHSystems.com


Double Ridge Guide Horn Antenna

Model: SAS-570

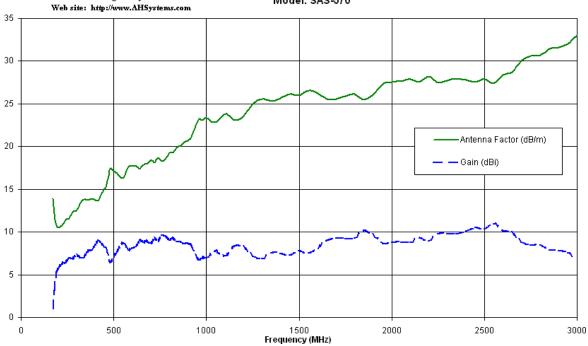


A.H. Systems Inc.


9710 Cozycroft Ave. Chatsworth, CA 91311

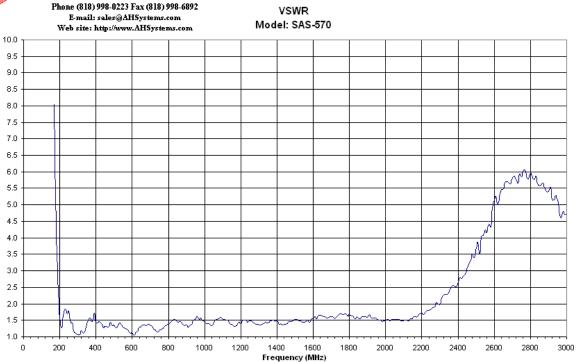


Tel: (818) 998-0223 Fax: (818) 998-6892

sales@AHSystems.com www.AHSystems.com







Physical Dimensions:

Length: 36.7 in. (93.2 cm) Width: 28.7 in. (72.9 cm) Height: 38.5 in. (97.8 cm) Weight: 22.5 lb.'s (10.21 kg)

Aperture: 27.2" x 37.2" (69cm x 94.5cm)